




YAMAHA Single-Axis Robots

# TRANSERVO

Stepping Servo (SS04 / SSC04 / SS05 / SSC05 / SS05H / SSC05H)

**The TRANSERVO by YAMAHA !**  
**Stepping motor single-axis robots**  
**that break all the old rules !**

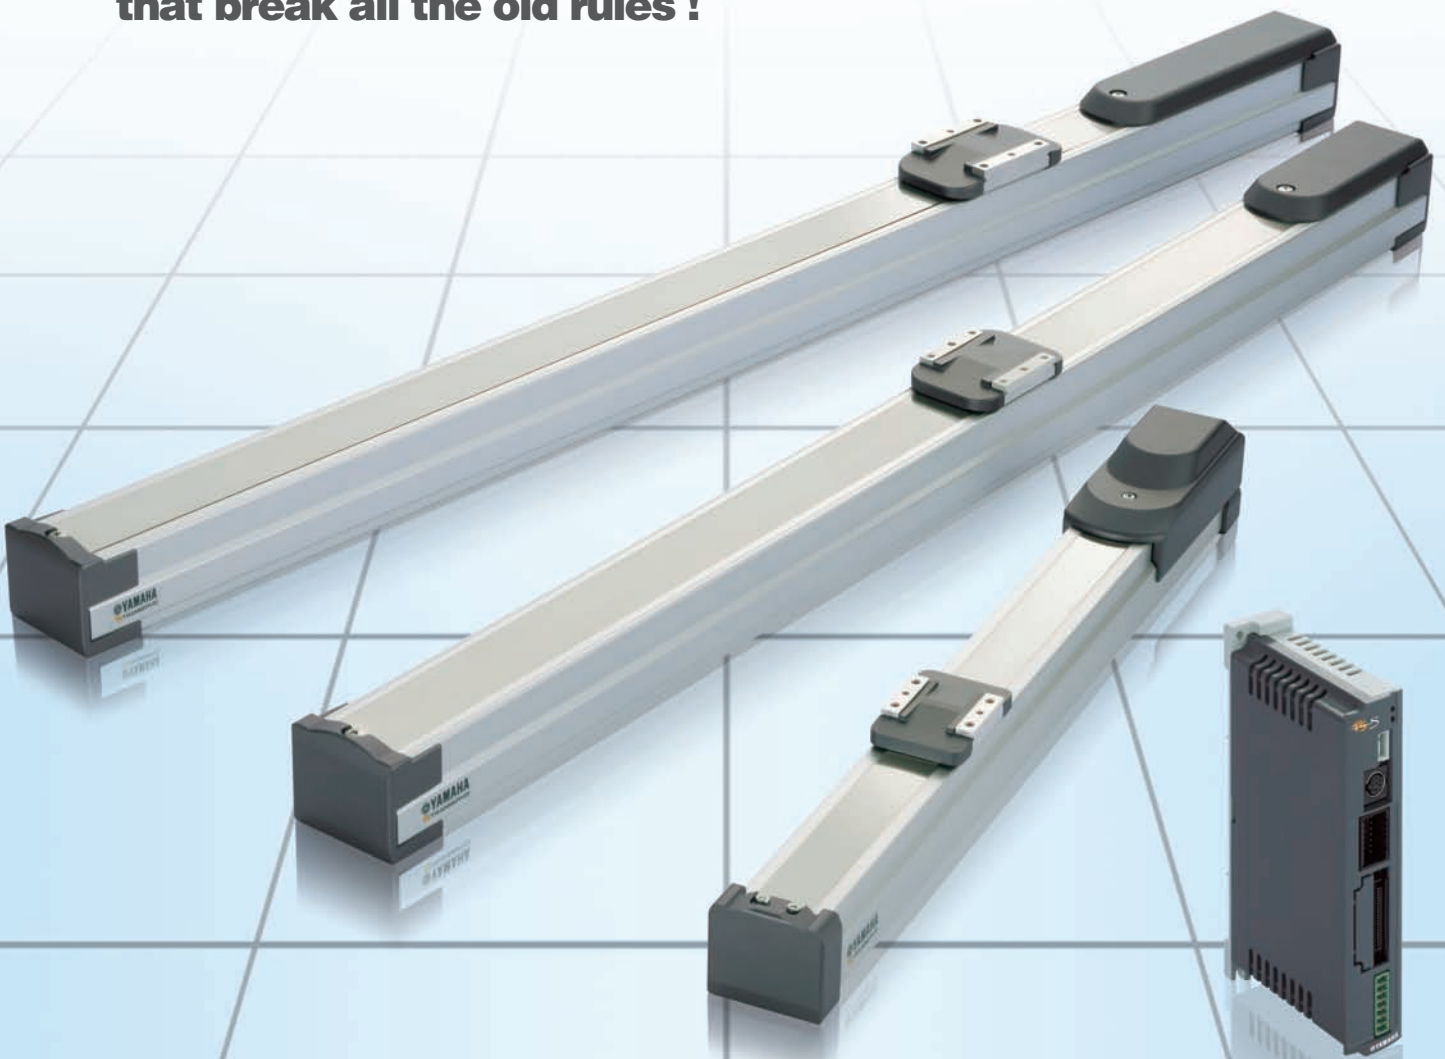

# The TRANSERVO – Don't you know about it yet?

Thanks for taking the time to check out our catalog!

You are probably using single-axis robots for all kinds of applications with functions like positioning and push aren't you? Well, the TRANSERVO is a new type of compact single-axis robot that combines the best features of stepping motors and servomotors.

In recent years, automated machinery is being subjected to ever tougher demands in terms of specifications, costs, and deadlines of delivery, which call for nearly superhuman efforts from designers.

Well the TRANSERVO will prove the answer to all those design problems.




## 1 New control method combines the best features of servo and stepping motors!

Stepping motors have great features such as a low cost and no tiny vibrations while stopped. Yet they also have drawbacks such as a drastic drop in torque at high speeds and heavy current consumption while stopped.

The TRANSERVO by YAMAHA eliminates all these problems by adopting an innovative vector control method. In effect, the TRANSERVO delivers the same functions and low cost of a servomotor while using a stepping motor.

### ● High-speed operation slashes production time!

TRANSERVO moves even a heavy workpiece quickly because the payload is constant up to its maximum speed. On ordinary equipment, with conventional control the upper model has to be selected to match the high-speed range, but now one model can do it all!

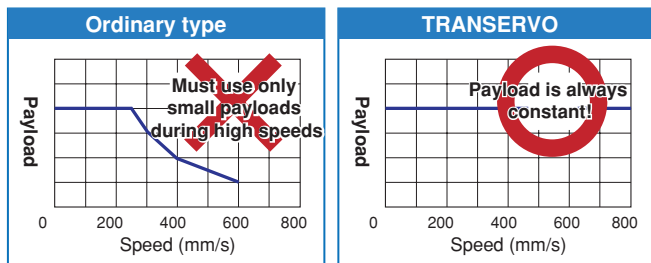

### ● Energy saver! Perfect stop!

Control is basically the same as a servomotor so power consumption is kept to a minimum, which saves energy and helps cut down on CO<sub>2</sub> emissions. Also perfect stop can be achieved as the same as with ordinary stepping motors so choose this setting if needed.

### ● Quiet operation – Just like a servo motor!

Robots using ordinary stepping motors have a characteristic "shrill" or high-pitched noise during operation. TRANSERVO operation, however, is extremely quiet, just like a servo motor!

Stepping motor	Servo Motors
<ul style="list-style-type: none"> <li>Simple design &amp; low cost</li> <li>No vibration while stopped</li> </ul>	<ul style="list-style-type: none"> <li>Movement is smooth</li> <li>Constant torque at all speed range</li> </ul>
<b>Combines the best features of both types!</b>	
<ul style="list-style-type: none"> <li>high-pitched operating noise</li> <li>drop in torque at high-speed</li> </ul>	<ul style="list-style-type: none"> <li>Tiny vibrations while stopped</li> <li>Cost is high</li> </ul>

## 2 Environmentally rugged resolver provides closed loop control

Of course "no step-out". The resolver used here for detecting the motor position is the same well-known and reliable resolver as used in our high-level robots. It offers stable position detection even in harsh environments containing dust or oil, etc. Moreover, it boasts a high resolving power of 20480 pulses per rotation.




The resolver is a magnetic position detector. Its structure is simple with no electronic component and no optical elements. One great feature compared to ordinary optical encoders is that there are very few points where a failure might occur. Vast quantities of resolvers are used in fields like aviation and the automobile industry where reliability is essential and also because they are highly tough in harsh environments with a low failure rate.

## 3 Ideal 4-line circular-groove 2-point contact guide gives longer service life

A newly developed module guide is employed, and a 4-line circular-groove 2-point contact guide, which has been used for high-level models, was built into a body that is just as compact as the previous models.


Guide maintains a satisfactory rolling movement with minimal ball differential slip, even if a large momentum load is applied or the installation surface accuracy (flatness) is bad. Rugged design ensures that breakdowns from problems like abnormal wear will seldom occur.



2-line gothic-arch-groove 4-point contact guide

### ► Ordinary model

Large differential slip tends to occur when a large momentum load is applied or installation surface accuracy is poor.



4-line circular-arc-groove 2-point contact guide

### ► TRANSERVO

Utilizes a circular-arc-groove 2-point contact guide. Ball differential slip (spin) is minimal.

## TRANSERVO Series Lineup

A maximum stroke up to 800mm. High lead types are also available on the SS05/SS05H for unmatched speed!

Model	Lead (mm)	Payload (kg)		Stroke (mm) and maximum speed (mm/s)																		
		Horizontal	Vertical	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800			
SS04 SSC04	12	2	1	600																		
	6	4	2	300																		
	2	6	4	100																		
SS05 SSC05	20	4	-	1000											933	833	733	633				
	12	6	1	600											560	500	440	380				
	6	10	2	300											280	250	220	190				
SS05H SSC05H	20	6	-	1000											933	833	733	633				
		8	-	600											560	500	440	380				
	12	-	2	500															440	380		
		12	-		300															280	250	220
	6	-	4	250																	220	190

## Ordering Method Example: SS05-06SB-NN-600-1L-SNP

**SS05** - [ ] **S** [ ] - [ ] - [ ] - [ ] - [ ] - **S** [ ]

Standard model	Lead	Type	Brake	Origin position	Grease option	Stroke	Cable length	Controller	I/O
SS04 SS05 SS05H	02: 2mm 06: 6mm 12: 12mm 20: 20mm	S: Straight	B: With brake N: With no brake	N: Standard origin position Z: Non-motor side	N: Standard grease C: Clean room grease	SS04: 50 to 400 SS05: 50 to 800 SS05H: 50 to 800 (50mm pitch)	1L: 1 meter 3L: 3 meters 5L: 5 meters 10L: 10 meters (flexible cables)	S: TS-S	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet

**SSC05** - [ ] **S** [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - **S** [ ]

Clean room model	Lead	Type	Brake	Air coupler position	Origin position	Stroke	Cable length	Controller	I/O
SSC04 SSC05 SSC05H	02: 2mm 06: 6mm 12: 12mm 20: 20mm	S: Straight	B: With brake N: With no brake	RJ: Right LJ: Left	N: Standard origin position Z: Non-motor side	SS04: 50 to 400 SS05: 50 to 800 SS05H: 50 to 800 (50mm pitch)	1L: 1 meter 3L: 3 meters 5L: 5 meters (flexible cables)	S: TS-S	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet


## TRANSERVO Basic Specifications

Model No.	SS04/SSC04	SS05/SSC05	SS05H/SSC05H							
Motor	42 □ step motor									
Repeatability (mm)	±0.02									
Position detector	Resolver									
Reduction mechanism	Ball screw φ8		Ball screw φ12							
Ball screw lead (mm)	12	6	2	20	12	6	20	12	6	
Maximum speed (mm/s)	Horizontal	600	300	100	1000	600	300	1000	600	300
	Vertical								500	250
Maximum payload (Kg)	Horizontal	2	4	6	4	6	10	6	8	12
	Vertical	1	2	4	-	1	2	-	2	4
Max. pressing force (N)	45	90	150	27	45	90	36	60	120	
Stroke (mm)	50 to 400		50 to 800		50 to 800					
Degree of cleanliness	CLASS 10 (0.1 micron base; only for clean room models)									

## TS-S Basic Specifications

Model No.	TS-S
Number of controllable axes	1
Controllable robots	TRANSERVO
Dimensions	W30xH162xD82mm
Weight	Approx. 200g
Input power supply voltage	DC24V±10%
Power capacity	70VA
Resolution	20480 pulses/rev
Control method	Closed loop, vector control method
Number of points	255
Number of error logs	50
Operating temperature / storage temperature	0 to 40°C / -10 to 65°C

### TS-S system configuration

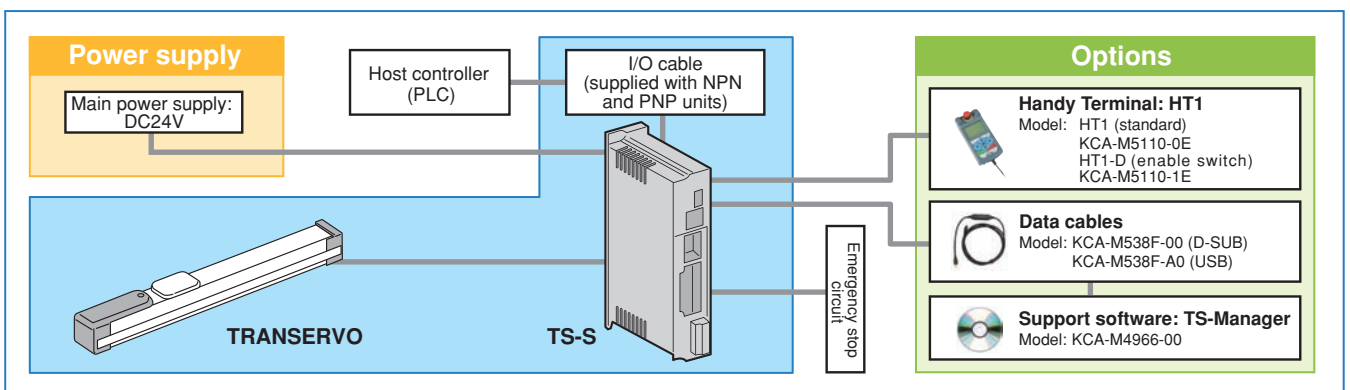

# Dedicated Robot Positioner TS-S



TS-S is a positioner type controller that only performs point trace. No program is needed. Operation is simple. After setting point data, specify the point number and enter a START signal from a host controller such as a PLC. Positioning or pushing operation then begins.

## Main operation patterns

### Normal operation

ABS (absolute) operation	<p>Moves to a specified coordinate position.</p> <p>Moves to the target position relative to the origin point and completes positioning.</p>	INC (incremental) operation	<p>Moves a specified distance from the current position.</p> <p>Moves from the current position just by a distance specified in point data and completes positioning.</p>
Pushing operation	<p>Pushes at a fixed thrust.</p> <p>Moves while pushing at a preset push force.</p>	Pushing after decelerating	<p>Decelerates and then pushes.</p> <p>Pushing starts after decelerating at a distance equal to "Near width (N)" from the target position.</p>

### Merge operation

Merge operation

Changes speed with no deceleration.

Moves to multiple points in succession. If different speeds were set, then the speeds are changed without decelerating and stopping to continue point-to-point operation.

### Output pattern

Zone output

Output turns ON when a specified zone is entered.

Zone for external I/O output can be set for each point.

"Near width" output

Specify position margin zone.

"Near width" output zone can be set for each point as a position margin zone where "positioning complete" signal is to be output.

## TS series main functions

### Detailed data can be set for each point

Settings such as acceleration, deceleration, zone output range, and position margin zone can be set for each point. Different operations can be easily specified by combining these settings with the above operation patterns.

#### Setting items

Setting item	Description
1 Run type	Specifies operation pattern such as ABS, INC, positioning, push, and point-to-point link.
2 Position	Specifies position or distance to move.
3 Speed	Specifies maximum speed during operation.
4 Accel.	Specifies acceleration during operation.
5 Decel.	Specifies deceleration during operation (Percentage of acceleration)
6 Push	Specifies motor current limitation during pushing operation.
7 Zone (-)	Specifies upper and lower limits of "personal zone" for each point data.
8 Zone (+)	Specifies upper and lower limits of "personal zone" for each point data.
9 Near width	Specifies position margin zone where "near width" output should turn on.
10 Jump	Specifies next movement destination after positioning or linked destination for point-to-point operation.
11 Flag	Specifies stop mode and others.

Note: Acceleration and deceleration can be set in easy-to-understand percentage (%) units (standard setup) or in SI units (custom setup) which make it easy to calculate the cycle time.

### Maximum acceleration auto setting

Acceleration is a critical parameter that determines how long the robot can continue operating (or service life). In worst cases, setting the acceleration too high may cause the robot to breakdown after a short time.

On the TS series, the maximum acceleration is finely set by taking into account the service life span of the motor output and the guide for each robot model and payload. This eliminates any worry about setting the acceleration too high by mistake.


### Full range of monitor functions

The TS-Manager software was developed exclusively for the TS series. Besides data write and edit, data backup, and parameter settings, it has a cycle time simulator and various types of monitor functions.

A run distance monitor is also included as a standard feature, which helps determine maintenance schedules. Design stresses easy use and friendly operation.

**Main monitor displays**

- Position
- Speed
- Current
- Load factor
- Voltage
- Temperature
- Input information
- Output information



### Supports various field networks

Select from the following I/O types to match the host controller specifications. All hardware is built into the positioner unit so cabling and wire hookups are easy.

Item	Description
NPN	Input: 16 points, 24VDC ± 10%, 5.1mA/point, positive common Output: 16 points, 24VDC ± 10%, 50mA/point, sink type
PNP	Input: 16 points, 24VDC ± 10%, 5.1mA/point, negative common Output: 16 points, 24VDC ± 10%, 50mA/point, source type
CC-Link	Supports CC-Link Ver. 1.10, remote device station (1 station)
DeviceNet	DeviceNet slave node

## Connection to Peripheral Units

### Input signal

Signal name	Meaning	Description
PIN0 to PIN7	Point number selection	<ul style="list-style-type: none"> <li>Point number used to perform positioning operation</li> <li>Point number to teach current position</li> </ul>
JOG+	Jog (+)	Jogs in plus (+) direction when ON.
JOG-	Jog (-)	Jogs in plus (-) direction when ON.
MANUAL	Manual mode	ON: manual mode
ORG	Return-to-origin	Starts return-to-origin.
/LOCK	Interlock	ON: Movement possible, OFF: Movement impossible
START	Start	Starts moving to position specified by point number.
TEACH	Teach	Teaches current position to specified point number.
RESET	Reset	<ul style="list-style-type: none"> <li>Resets alarm.</li> <li>Resets point number output.</li> <li>Clears remaining distance in relative positioning operation.</li> </ul>
SERVO	Servo ON	ON: Servo ON, OFF: Servo OFF

### Output signal

Signal name	Meaning	Description
POUT0 to POUT7	Point number selection	<ul style="list-style-type: none"> <li>Point number used to perform positioning operation</li> <li>Alarm number when alarm has occurred</li> </ul>
OUT0	Control output 0	Allocate the following outputs to OUT0 to OUT3. <ul style="list-style-type: none"> <li>Zone output</li> <li>Personal zone output</li> <li>Manual mode status</li> <li>Return-to-origin status</li> <li>Near width output</li> <li>Movement-in-progress output</li> <li>Push status</li> <li>Warning output</li> </ul>
OUT1	Control output 1	
OUT2	Control output 2	
OUT3	Control output 3	
ZONE	Zone output	Turns ON while at the zone specified by parameter.
PZONE	Personal zone output	Turns ON while at the zone specified by point setting.
MANU-S	Manual mode status	Turns ON when in manual mode.
ORG-S	Return-to-origin status	Turns ON when return-to-origin is complete.
TLM-S	Push status	Turns ON during push in pushing operation.
/WARN	Warning output	Turns ON when warning is issued.
NEAR	Near width output	Turns ON when near width (position margin zone) is entered.
MOVE	Movement in progress	Turns on during movement.
BUSY	Operation in progress	Outputs ON during operation.
END	Operation complete	Outputs operation result. Turns ON when operation has ended normally.
/ALM	Alarm	Turns ON when operation is normal. Turns OFF when alarm has occurred.
SRV-S	Servo status	Outputs ON at servo-on.

## TS Series Options (for all TS series models)

TS-S TS-X TS-P

### Handy Terminal: HT1



Has graphic LCD display with backlight for easy viewing.

- Model:
- HT1 (standard) KCA-M5110-0E
  - HT1-D (enable switch) KCA-M5110-1E

### TS-Manager (support software)



Besides data writing, editing and backup functions, the TS-Manager also offers cycle time simulation and various types of monitor functions.

Model: KCA-M4966-00

### Data cables



TS-Manager data cable  
Select from USB cable or D-sub cable.

- Model: KCA-M538F-00 (D-sub)  
KCA-M538F-A0 (USB)


### I/O cables (for maintenance tasks)



NPN or PNP I/O cables  
Color-coded flat cables.  
Lattice type, 20 conductors x 2, total length 2 meters, one end unterminated.  
(This cable is supplied with NPN and PNP units)

Model: KCA-M4421-20


### TRANSERVO robot cable (flexible cable) (Cable specifically designed to connect TS-S to SS04/SS05/SS05H/SSC04/SSC05/SSC05H)

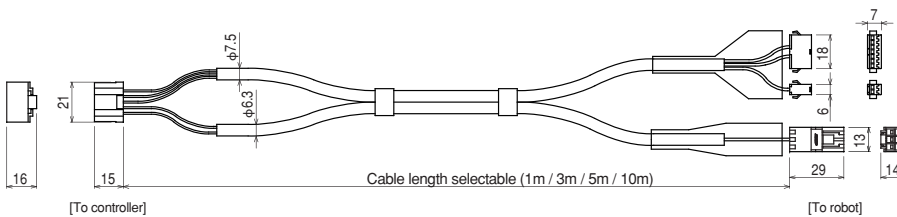

- Model: KCK-M4751-10 (1m)  
KCK-M4751-30 (3m)  
KCK-M4751-50 (5m)  
KCK-M4751-A0 (10m)

Note: The standard units of the TRANSERVO series robots and positioners are CE compliant.

### TS-S

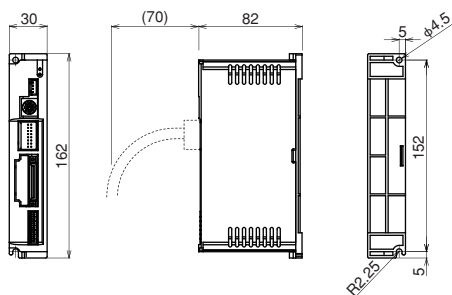



# SS04

● CE compliance

## Ordering Method

<b>SS04</b>		<b>S</b>						<b>S</b>	
<b>Robot</b>	<b>Lead</b>	<b>Type</b>	<b>Brake</b>	<b>Origin position</b>	<b>Grease option</b>	<b>Stroke</b>	<b>Cable length*1</b>	<b>Controller</b>	<b>I/O</b>
	12 : 12mm 6 : 6mm 2 : 2mm	S: Straight	B: With brake N: With no brake	N: Standard origin position Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 400 (50mm pitch)	1L : 1m 3L : 3m 5L : 5m 10L : 10m	S : TS-S	NP : NPN PN : PNP CC : CC-Link DN : DeviceNet


\*1: The robot cable is flexible and resists bending.

## Basic specifications

Motor	42 □ Step motor		
Repeated positioning accuracy*1 (mm)	±0.02		
Deceleration mechanism	Ball screw φ8 (Class C10)		
Ball screw lead (mm)	12	6	2
Maximum speed (mm/sec)	600	300	100
Maximum payload (kg)	Horizontal installation	2	4
	Vertical installation	1	2
Max. pressing force (N)	Horizontal installation	45	90
	Vertical installation	2	4
Stroke (mm)	50 to 400 (50 pitch)		
Overall length (mm)	Horizontal installation	Stroke+216	
	Vertical installation	Stroke+261	
Maximum outside dimension of body cross-section	W49×H59mm		
Cable length (m)	Standard : 1 / Option : 3, 5, 10		

\*1: Positioning repeatability in one direction.


## Allowable overhang\*



Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)				
	A	B	C		A	B	C		A	B	C	
Lead12	1kg	807	218	292	1kg	274	204	776	Lead12	0.5kg	407	408
	2kg	667	107	152	2kg	133	93	611		Lead6	1kg	204
Lead6	2kg	687	116	169	2kg	149	102	656	Lead6		1kg	223
	3kg	556	76	112	3kg	92	62	516		Lead2	2kg	107
Lead2	4kg	567	56	84	4kg	63	43	507	Lead2		2kg	118
	4kg	869	61	92	4kg	72	48	829		Lead2	4kg	53
	6kg	863	40	60	6kg	39	29	789				

\* Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 400mm stroke models).

## Static loading moment




(Unit: N.m)		
MY	MP	MR
16	19	17

## Controller

Controller	Operation method
TS-S	Point trace

## SS04

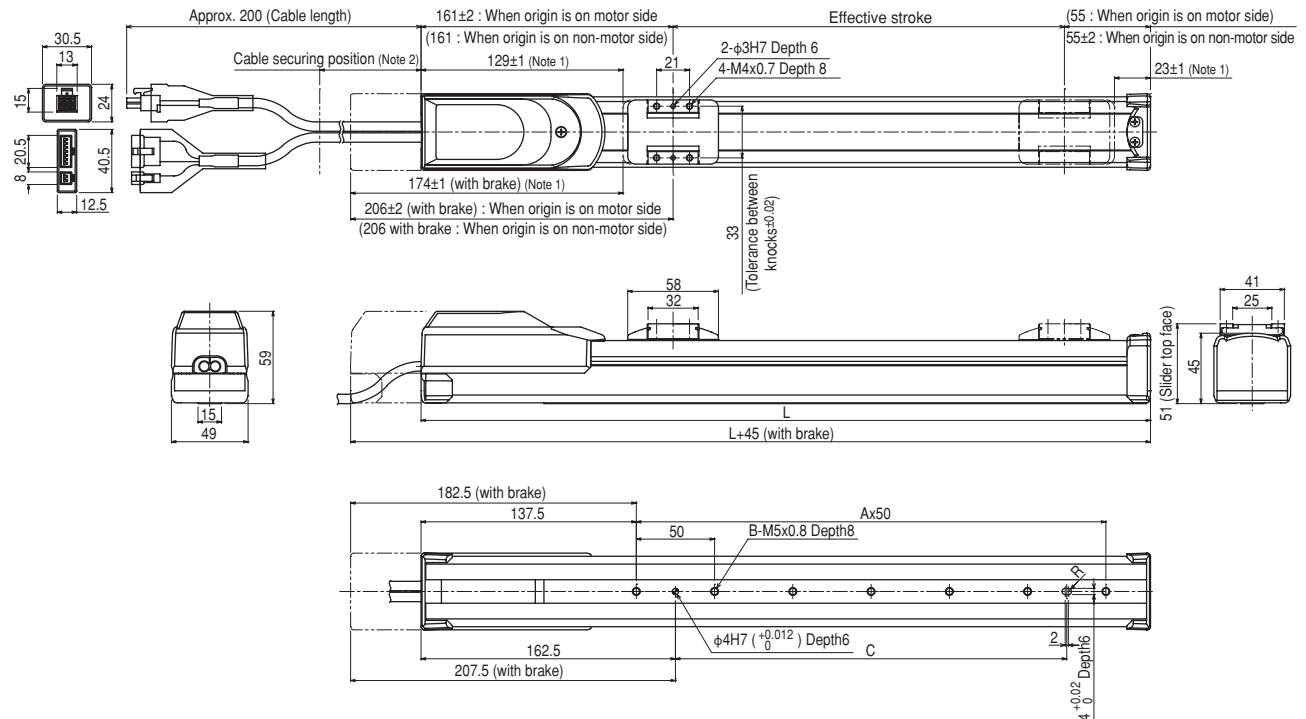

Effective stroke	50	100	150	200	250	300	350	400
L	266	316	366	416	466	516	566	616
A	2	3	4	5	6	7	8	9
B	3	4	5	6	7	8	9	10
C	50	100	150	200	250	300	350	400
Weight (kg) (See note 4)	1.5	1.6	1.7	1.8	2.0	2.1	2.2	2.3

Note 1. Stop positions are determined by the mechanical stoppers at both ends.  
 Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.  
 Note 3. The cable's minimum bend radius is R30.  
 Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.

# SS05

High lead: Lead 20      CE compliance

## Ordering Method

### SS05

<b>Robot</b>	<b>Lead</b>	<b>Type</b>	<b>Brake</b>	<b>Origin position</b>	<b>Grease option</b>	<b>Stroke</b>	<b>Cable length<sup>*1</sup></b>	<b>S</b>	<b>I/O</b>
	20 : 20mm 12 : 12mm 6 : 6mm	S: Straight	B: With brake N: With no brake	N: Standard origin position Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 800 (50mm pitch)	1L : 1m 3L : 3m 5L : 5m 10L : 10m	S: TS-S	NP : NPN PN : PNP CC : CC-Link DN : DeviceNet


\*1: Brake-equipped models can be selected only when the lead is 12mm or 6mm.  
\*2: The robot cable is flexible and resists bending.

## Basic specifications

Motor	42 □ Step motor		
Repeated positioning accuracy <sup>*1</sup> (mm)	±0.02		
Deceleration mechanism	Ball screw φ12 (Class C10)		
Ball screw lead (mm)	20	12	6
Maximum speed (mm/sec) <sup>*2</sup>	1000	600	300
Maximum payload (kg)	Horizontal installation	4	6
	Vertical installation	-	1
Max. pressing force (N)	Horizontal installation	27	45
	Vertical installation	27	45
Stroke (mm)	50 to 800 (50 pitch)		
Overall length (mm)	Horizontal installation	Stroke+230	
	Vertical installation	Stroke+275	
Maximum outside dimension of body cross-section	W55×H56mm		
Cable length (m)	Standard : 1 / Option : 3, 5, 10		

\*1: Positioning repeatability in one direction.  
\*2: When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, reduce the speed by referring to the maximum speeds shown in the table under the dimensional drawing.


## Allowable overhang\*



Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)				
Lead	A	B	C	Lead	A	B	C	Lead	A	B	C	
Lead20	2kg	413	139	218	2kg	192	123	372	Lead12	0.5kg	578	579
	4kg	334	67	120	4kg	92	51	265		1kg	286	286
Lead12	4kg	347	72	139	4kg	109	57	300	Lead6	1kg	312	312
	6kg	335	47	95	6kg	63	31	263		2kg	148	148
Lead6	4kg	503	78	165	4kg	134	63	496				
	8kg	332	37	79	6kg	76	35	377				
10kg	344	29	62	8kg	47	22	355					

\* Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 600mm stroke models).

## Static loading moment




(Unit: N.m)		
MY	MP	MR
25	33	30

## Controller

Controller	Operation method
TS-S	Point trace

## SS05

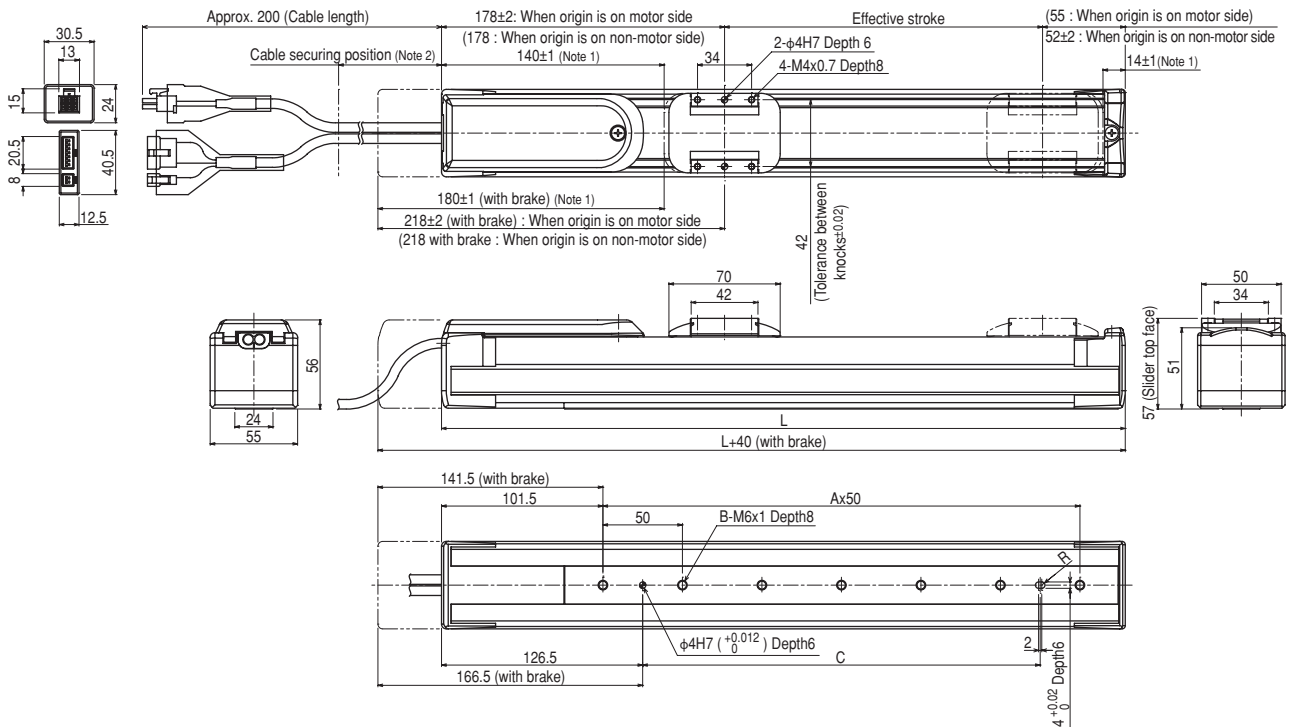

Effective stroke	Stroke (mm)															
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	280	330	380	430	480	530	580	630	680	730	780	830	880	930	980	1030
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
B	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500
Weight (kg) (See note 4)	2.1	2.3	2.5	2.7	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.6	4.8	5.0
Maximum speed for each stroke (mm / sec) (Note 5)	Lead 20	1000														
	Lead 12	600														
	Lead 6	300														
	Speed setting	-														
		93%	83%	73%	63%											

Note 1. Stop positions are determined by the mechanical stoppers at both ends.  
Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.  
Note 3. The cable's minimum bend radius is R30.  
Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.  
Note 5. When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, adjust to reduce the speed on the program by referring to the maximum speeds shown in the table at the left.

# SS05H

- High lead: Lead 20
- CE compliance

## Ordering Method

<b>SS05H</b>		<b>S</b>							<b>S</b>	
<b>Robot</b>	<b>Lead</b>	<b>Type</b>	<b>Brake</b>	<b>Origin position</b>	<b>Grease option</b>	<b>Stroke</b>	<b>Cable length<sup>*1</sup></b>	<b>Controller</b>	<b>I/O</b>	
	20 : 20mm 12 : 12mm 6 : 6mm	S: Straight	B: With brake N: With no brake	N: Standard origin position Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 800 (50mm pitch)	1L : 1m 3L : 3m 5L : 5m 10L : 10m	S : TS-S	NP : NPN PN : PNP CC : CC-Link DN : DeviceNet	


- \*1: Brake-equipped models can be selected only when the lead is 12mm or 6mm.  
\*2: The robot cable is flexible and resists bending.

## Basic specifications

Motor	42 □ Step motor		
Repeated positioning accuracy <sup>*1</sup> (mm)	±0.02		
Deceleration mechanism	Ball screw φ12 (Class C10)		
Ball screw lead (mm)	20	12	6
Maximum speed (mm/sec)	Horizontal installation	1000	600
	Vertical installation	—	500
Maximum payload (kg)	Horizontal installation	6	8
	Vertical installation	—	2
Max. pressing force (N)	36	60	120
Stroke (mm)	50 to 800 (50 pitch)		
Overall length (mm)	Horizontal installation	Stroke+286	
	Vertical installation	Stroke+331	
Maximum outside dimension of body cross-section	W55×H56mm		
Cable length (m)	Standard : 1 / Option : 3, 5, 10		

- \*1: Positioning repeatability in one direction.  
\*2: When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, reduce the speed by referring to the maximum speeds shown in the table under the dimensional drawing.


## Allowable overhang<sup>\*</sup>



	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)				
	A	B	C	A	B	C	A	B	C		
Lead20	2kg	599	225	291	2kg	262	203	554	1kg	458	459
	4kg	366	109	148	4kg	118	88	309	2kg	224	224
	6kg	352	71	104	6kg	71	49	262	2kg	244	245
	4kg	500	118	179	4kg	146	96	449	4kg	113	113
Lead12	6kg	399	79	118	6kg	85	55	334			
	8kg	403	56	88	8kg	55	34	305			
	6kg	573	83	136	6kg	101	62	519			
	8kg	480	61	100	8kg	64	39	413			
Lead6	10kg	442	47	78	10kg	43	26	355			
	12kg	465	39	64	12kg	28	17	338			

- \* Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 600mm stroke models).

## Static loading moment




(Unit: N.m)		
MY	MP	MR
32	38	34

## Controller

Controller	Operation method
TS-S	Point trace

## SS05H

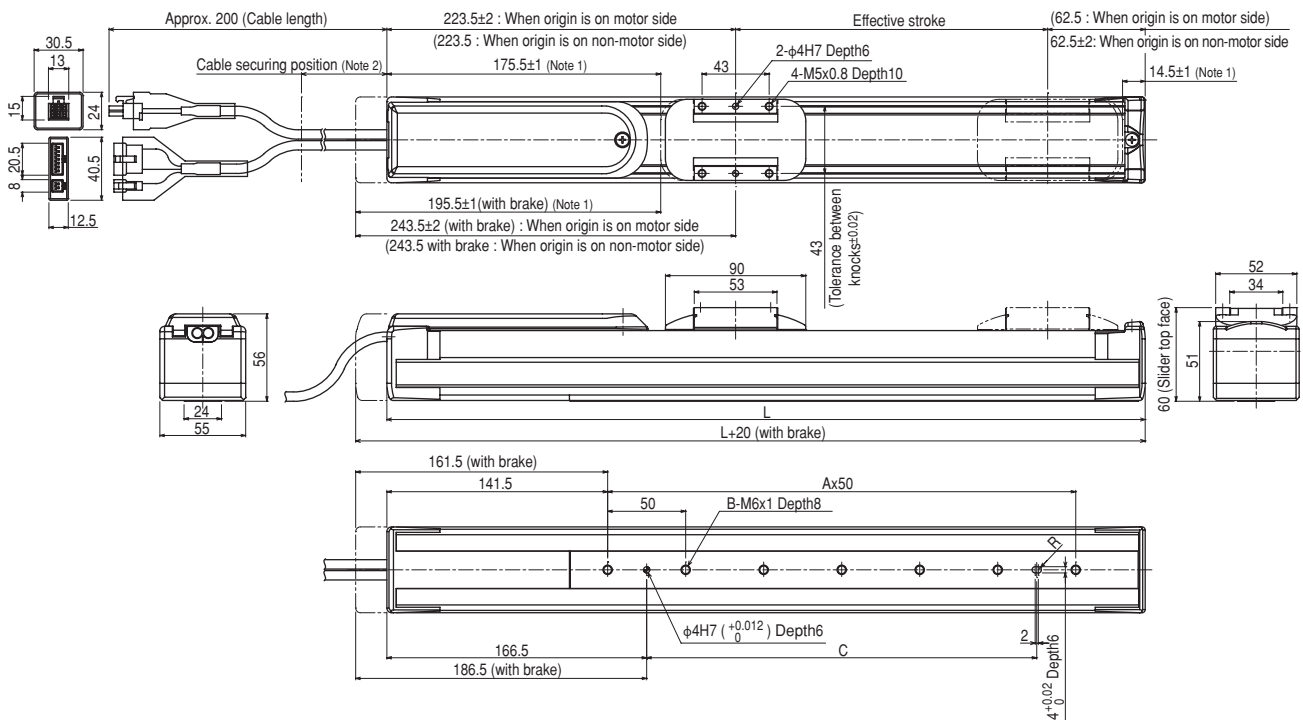

Effective stroke	Stroke (mm)																
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	
L	336	386	436	486	536	586	636	686	736	786	836	886	936	986	1036	1086	
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
B	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500	
Weight (kg) (See note 4)	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.5	4.7	4.9	5.1	5.3	
Maximum speed for each stroke (mm / sec) (Note 5)	Lead 20	1000															
	Lead 12 (Horizontal)	600															
	Lead 12 (Vertical)	500															
	Lead 6 (Horizontal)	300												280	250	220	190
	Lead 6 (Vertical)	250												220	190		

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.  
Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.  
Note 3. The cable's minimum bend radius is R30.  
Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.  
Note 5. When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, adjust to reduce the speed on the program by referring to the maximum speeds shown in the table at the left.



# SSC04

● CE compliance

## Ordering Method

<b>SSC04</b>		<b>S</b>						<b>S</b>	
<b>Robot</b>	<b>Lead</b>	<b>Type</b>	<b>Brake</b>	<b>Direction of air coupler installation</b>	<b>Origin position</b>	<b>Stroke</b>	<b>Cable length<sup>*1</sup></b>	<b>Controller</b>	<b>I/O</b>
	12 : 12mm 6 : 6mm 2 : 2mm	S: Straight	B: With brake N: With no brake	RJ : Right (standarg) LJ : Left	N: Standard origin position Z: Non-motor side	50 to 400 (50mm pitch)	1L : 1m 3L : 3m 5L : 5m	S : TS-S	NP : NPN PN : PNP CC : CC-Link DN : DeviceNet


\*1: The robot cable is flexible and resists bending.

## Basic specifications

Motor	42 □ Step motor		
Repeated positioning accuracy <sup>*1</sup> (mm)	±0.02		
Deceleration mechanism	Ball screw φ8 (Class C10)		
Maximum motor torque	0.27		
Ball screw lead (mm)	12	6	2
Maximum speed (mm/sec)	600	300	100
Maximum payload (kg)	Horizontal installation	Stroke+216	
	Vertical installation	1	2
Max. pressing force (N)	45	90	150
Stroke (mm)	50 to 400 (50 pitch)		
Overall length (mm)	Horizontal installation	Stroke+216	
	Vertical installation	Stroke+261	
Maximum outside dimension of body cross-section	W49xH59mm		
Cable length (m)	Standard : 1 / Option : 3, 5		
Cleanliness class	CLASS 10 <sup>*2</sup>		
Suction amount Air	Lead 12	Lead 6	Lead 2
	50	30	15

\*1: Positioning repeatability in one direction.  
\*2: Per 1cf (0.1μm base), when suction blower is used.


## Allowable overhang\*



Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)			
	A	B	C		A	B	C		A	B	C
Lead12	1kg	807	218	292	1kg	274	204	776	0.5kg	407	408
	2kg	667	107	152	2kg	133	93	611	1kg	204	204
Lead6	2kg	687	116	169	2kg	149	102	656	1kg	223	223
	3kg	556	76	112	3kg	92	62	516	2kg	107	107
Lead2	4kg	567	56	84	4kg	63	43	507	2kg	118	118
	4kg	869	61	92	4kg	72	48	829	4kg	53	53
	6kg	863	40	60	6kg	39	29	789			

\* Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 400mm stroke models).

## Static loading moment




(Unit: N.m)		
MY	MP	MR
16	19	17

## Controller

Controller	Operation method
TS-S	Point trace

## SSC04

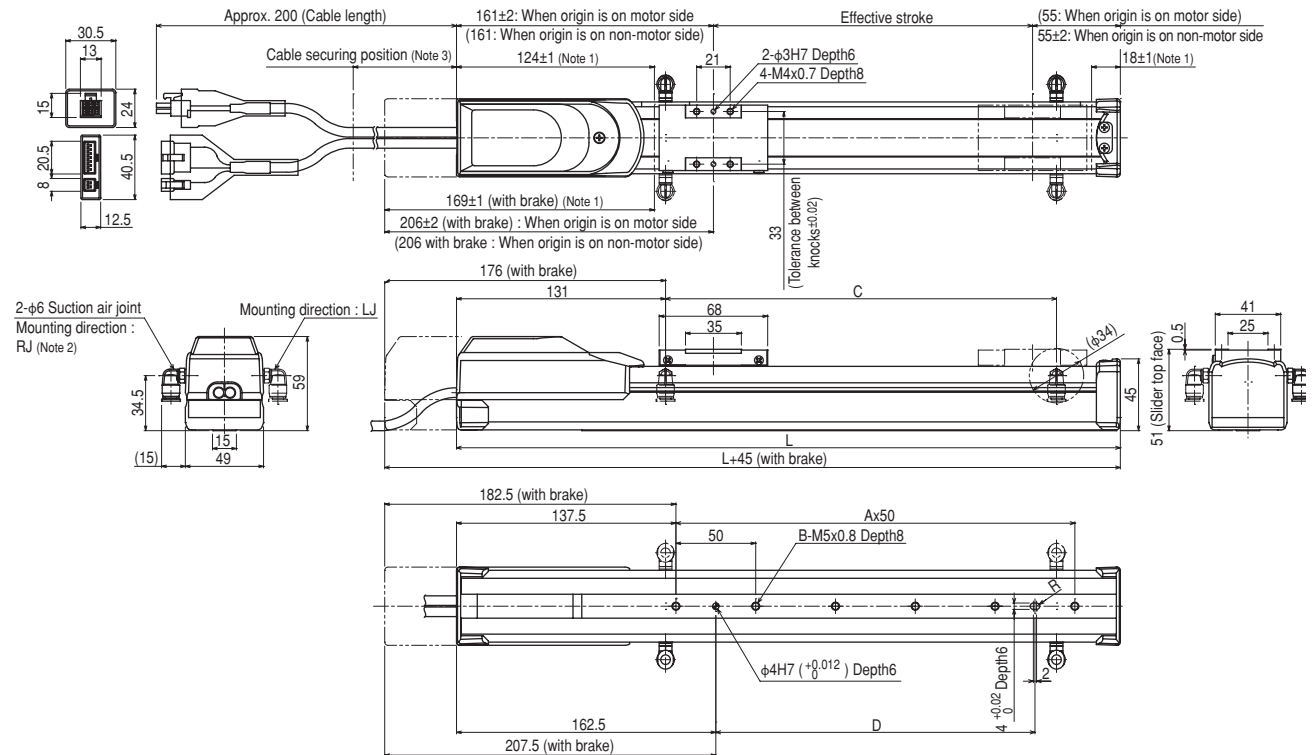

Effective stroke	50	100	150	200	250	300	350	400
L	266	316	366	416	466	516	566	616
A	2	3	4	5	6	7	8	9
B	3	4	5	6	7	8	9	10
C	50	100	150	200	250	300	350	400
Weight (kg) (See note 5)	1.5	1.6	1.7	1.8	2.0	2.1	2.2	2.3

Note 1. Stop positions are determined by the mechanical stoppers at both ends.  
Note 2. Either right or left can be selected for the installation direction for 6 suction air coupler. This drawing shows the RJ (standard) direction of air coupler installation.  
Note 3. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.  
Note 4. The cable's minimum bend radius is R30.  
Note 5. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.

# SSC05

● CE compliance

## Ordering Method


<b>SSC05</b>		<b>S</b>						<b>S</b>	
<b>Robot</b>	<b>Lead</b> 20 : 20mm 12 : 12mm 6 : 6mm	<b>Type</b> S: Straight	<b>Brake</b> B: With brake N: With no brake	<b>Direction of air coupler installation</b> RJ : Right (standarg) LJ : Left	<b>Origin position</b> N: Standard origin position Z: Non-motor side	<b>Stroke</b> 50 to 800 (50mm pitch)	<b>Cable length**</b> 1L : 1m 3L : 3m 5L : 5m	<b>Controller</b> S : TS-S	<b>I/O</b> NP : NPN PN : PNP CC : CC-Link DN : DeviceNet

\*1: The robot cable is flexible and resists bending.

## Basic specifications

Motor	42 □ Step motor		
Repeated positioning accuracy*1 (mm)	±0.02		
Deceleration mechanism	Ball screw φ12 (Class C10)		
Maximum motor torque	0.27		
Ball screw lead (mm)	20	12	6
Maximum speed (mm/sec)*2	1000	600	300
Maximum payload (kg)	Horizontal installation	4	6
	Vertical installation	—	1
Max. pressing force (N)	Horizontal installation	27	45
	Vertical installation	27	45
Stroke (mm)	50 to 800 (50 pitch)		
Overall length (mm)	Horizontal installation	Stroke+230	
	Vertical installation	Stroke+275	
Maximum outside dimension of body cross-section	W55xH56mm		
Cable length (m)	Standard : 1 / Option : 3, 5		
	Cleanliness class CLASS 10 <sup>-3</sup>		
Suction amount Air	Lead 20	Lead 6	Lead 2
	80	50	30


## Allowable overhang\*



	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)					
		A	B	C		A	B	C		A	C	
Lead 20	2kg	413	139	218	2kg	192	123	372	Lead 2	0.5kg	578	579
	4kg	334	67	120	4kg	92	51	265		1kg	286	286
	4kg	347	72	139	4kg	109	57	300		1kg	312	312
Lead 12	6kg	335	47	95	6kg	63	31	263	Lead 6	2kg	148	148
	4kg	503	78	165	4kg	134	63	496				
	8kg	332	37	79	6kg	76	35	377				
Lead 6	10kg	344	29	62	8kg	47	22	355				

\* Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 600mm stroke models).

## Static loading moment



(Unit: N.m)		
MY	MP	MR
25	33	30

## Controller


Controller	Operation method
TS-S	Point trace

\*1: Positioning repeatability in one direction.

\*2: When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, reduce the speed by referring to the maximum speeds shown in the table under the dimensional drawing.

\*3: Per 1cf (0.1µm base), when suction blower is used.

## SSC05

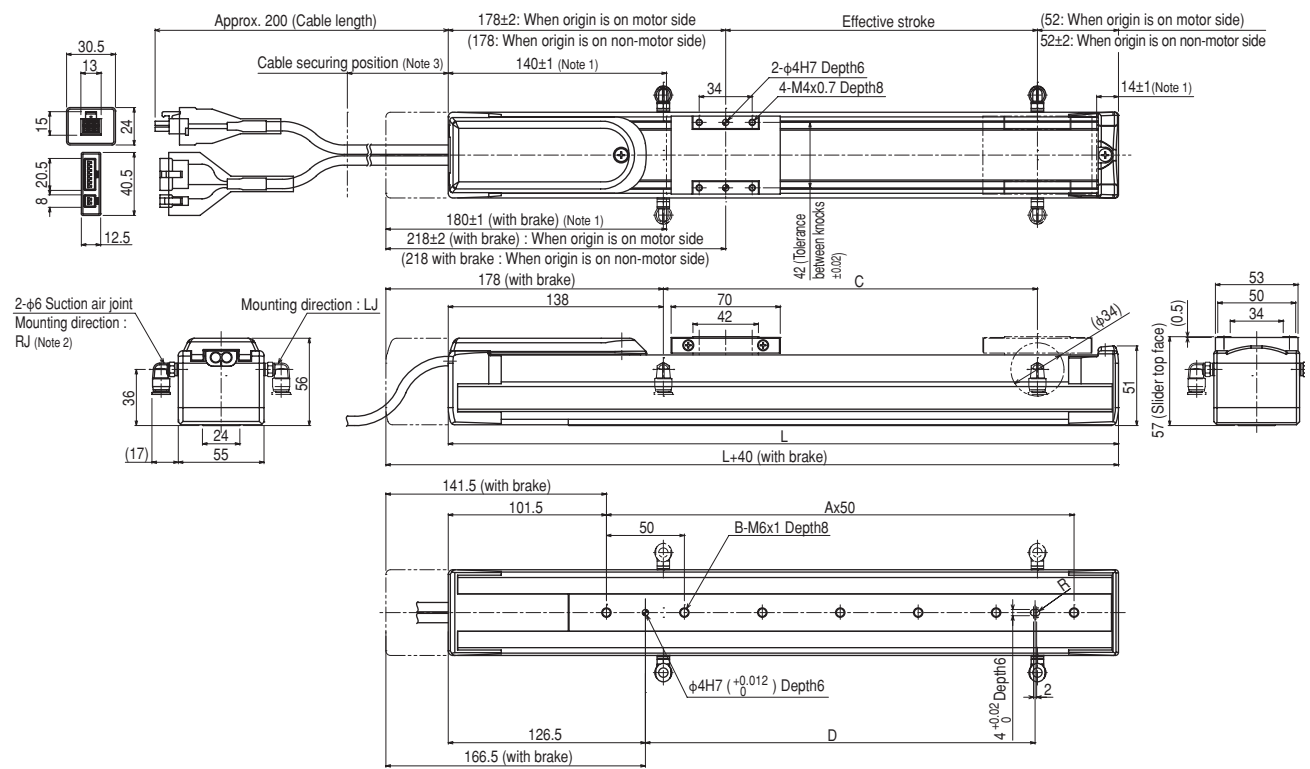

Effective stroke	Stroke (mm)																
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	
L	280	330	380	430	480	530	580	630	680	730	780	830	880	930	980	1030	
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
B	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500	
Weight (kg) (See note 5)	2.1	2.3	2.5	2.7	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.6	4.8	5.0	
Maximum speed for each stroke (mm/sec) (Note 6)	Lead 20	1000															
	Lead 12	600															
	Lead 6	300															

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
- Note 2. Either right or left can be selected for the installation direction for 6 suction air coupler. This drawing shows the RJ (standard) direction of air coupler installation.
- Note 3. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
- Note 4. The cable's minimum bend radius is R30.
- Note 5. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.
- Note 6. When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, adjust to reduce the speed on the program by referring to the maximum speeds shown in the table at the left.

# SSC05H

High lead: Lead 20 CE compliance

## Ordering Method

<b>SSC05H</b>		<b>S</b>						<b>S</b>	
<b>Robot</b>	<b>Lead</b>	<b>Type</b>	<b>Brake</b>	<b>Direction of air coupler installation</b>	<b>Origin position</b>	<b>Stroke</b>	<b>Cable length<sup>†</sup></b>	<b>Controller</b>	<b>I/O</b>
	20 : 20mm 12 : 12mm 6 : 6mm	S: Straight	B: With brake N: With no brake	RJ : Right (standarg) LJ : Left	N: Standard origin position Z: Non-motor side	50 to 800 (50mm pitch)	1L : 1m 3L : 3m 5L : 5m	S : TS-S	NP : NPN PN : PNP CC : CC-Link DN : DeviceNet


†1: The robot cable is flexible and resists bending.

## Basic specifications

Motor	42 □ Step motor		
Repeated positioning accuracy <sup>†1</sup> (mm)	±0.02		
Deceleration mechanism	Ball screw φ12 (Class C10)		
Maximum motor torque	0.47		
Ball screw lead (mm)	20	12	6
Maximum speed (mm/sec)	Horizontal installation	1000	600
	Vertical installation	—	500
Maximum payload (kg)	Horizontal installation	6	8
	Vertical installation	—	2
Max. pressing force (N)		36	60
Stroke (mm)	50 to 800 (50 pitch)		
Overall length (mm)	Horizontal installation	Stroke+286	
	Vertical installation	Stroke+331	
Maximum outside dimension of body cross-section	W55xH56mm		
Cable length (m)	Standard : 1 / Option : 3, 5		
Cleanliness class	CLASS 10 <sup>†3</sup>		
Suction amount Air	Lead 20	Lead 6	Lead 2
	80	50	30

†1: Positioning repeatability in one direction.  
 †2: When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, reduce the speed by referring to the maximum speeds shown in the table under the dimensional drawing.  
 †3: Per 1cf (0.1μm base), when suction blower is used.


## Allowable overhang\*



Horizontal installation (Unit: mm)					Wall installation (Unit: mm)					Vertical installation (Unit: mm)								
	A	B	C		A	B	C		A	C		A	C					
Lead20	2kg	599	225	291	2kg	262	203	554	Lead2	1kg	458	459	Lead6	1kg	458	459		
	4kg	366	109	148	4kg	118	88	309		2kg	224	224		2kg	244	245		
	6kg	352	71	104	6kg	71	49	262		4kg	113	113		4kg	113	113		
Lead12	4kg	500	118	179	4kg	146	96	449	Lead12	6kg	85	55	334	Lead6	6kg	573	83	136
	6kg	399	79	118	6kg	85	55	334		8kg	55	34	305		8kg	480	61	100
	8kg	403	56	88	8kg	55	34	305		10kg	43	26	355		10kg	442	47	78
Lead6	6kg	573	83	136	6kg	101	62	519	Lead6	12kg	28	17	338	Lead6	12kg	465	39	64
	8kg	480	61	100	8kg	64	39	413		12kg	28	17	338		12kg	465	39	64
	10kg	442	47	78	10kg	43	26	355		12kg	28	17	338		12kg	465	39	64

\* Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 600mm stroke models).

## Static loading moment




(Unit: N.m)		
MY	MP	MR
32	38	34

## Controller

Controller	Operation method
TS-S	Point trace

## SSC05H

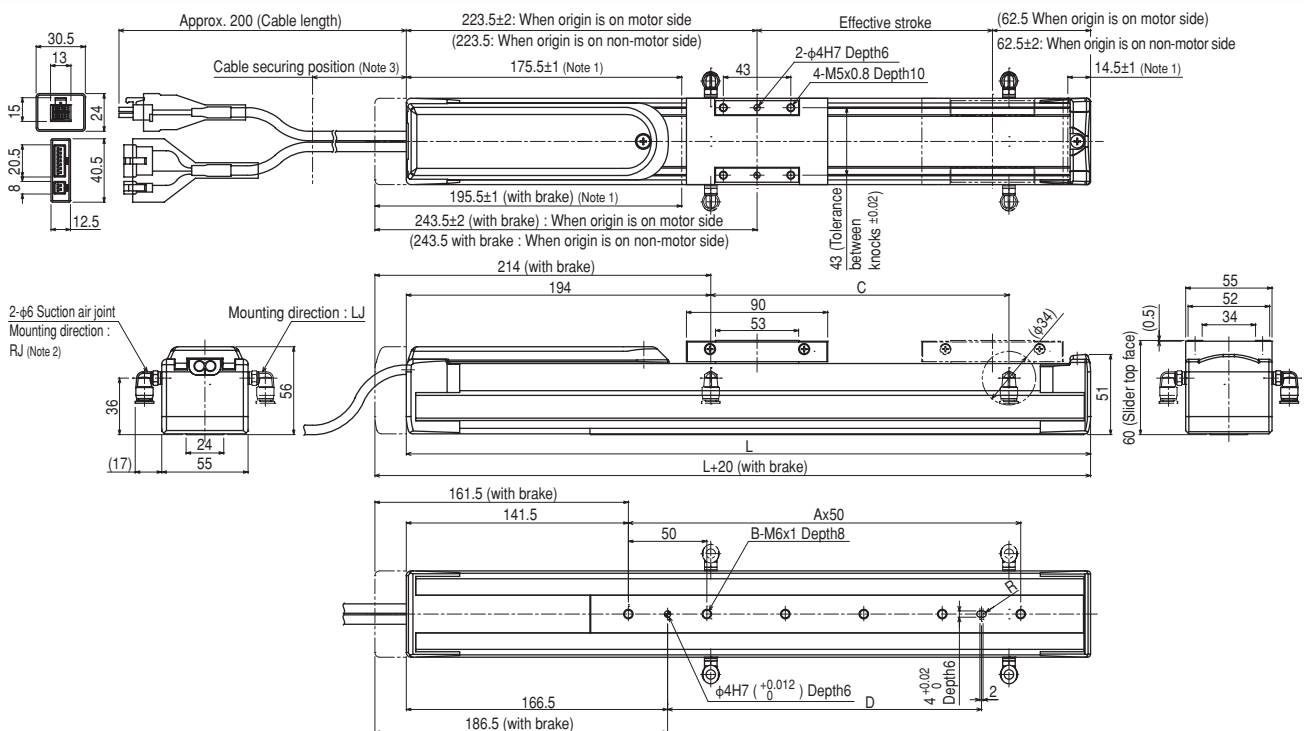

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800				
L	336	386	436	486	536	586	636	686	736	786	836	886	936	986	1036	1086				
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18				
B	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19				
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500				
Weight (kg) (See note 5)	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.5	4.7	4.9	5.1	5.3				
Maximum speed for each stroke (mm / sec) (Note 6)	Lead 20											1000			933	833	733	633		
	Lead 12 (Horizontal)											600			560	500	440	380		
	Lead 12 (Vertical)											500					440	380		
	Lead 6 (Horizontal)											300					280	250	220	190
	Lead 6 (Vertical)											250						220	190	

Note 1. Stop positions are determined by the mechanical stoppers at both ends.  
 Note 2. Either right or left can be selected for the installation direction for 6 suction air coupler. This drawing shows the RJ (standard) direction of air coupler installation.  
 Note 3. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.  
 Note 4. The cable's minimum bend radius is R30.  
 Note 5. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.  
 Note 6. When the stroke is longer than 650mm, the ball screw may resonate depending on the moving range (critical speed). In that case, adjust to reduce the speed on the program by referring to the maximum speeds shown in the table at the left.

● Specifications and appearance are subject to change without prior notice.

201005-C



**IM Operations**

882 Soude, Naka-ku, Hamamatsu, Shizuoka 435-0054, Japan  
Tel 81-53-460-6103 Fax 81-53-460-6811

**URL** <http://www.yamaha-motor.co.jp/global/industrial/robot/>  
**E-mail** [robotn@yamaha-motor.co.jp](mailto:robotn@yamaha-motor.co.jp)

In consideration of environment,  
this catalogue is made of recycled paper.

