MXYx 3 axes / ZFL20/10

Gantry type | Cable carrier | Z-axis: clamped base / moving table type (200W)



Ordering method

MXYx - C - [Combination] - [X-axis stroke] - [Y-axis stroke] - [ZR-axis] - [Z-axis stroke] - [Cable] - RCX340-3 - [Safety standard] - [Option A (OP.A)] - [Option B (OP.B)] - [Option C (OP.C)] - [Option D (OP.D)] - [Option E (OP.E)] - [Absolute battery]

Model	Cable	Combination	X-axis stroke	Y-axis stroke	ZR-axis	Z-axis stroke	Cable	Controller / Number of controllable axes	Safety standard	Option A (OP.A)	Option B (OP.B)	Option C (OP.C)	Option D (OP.D)	Option E (OP.E)	Absolute battery
MXYx	C	G1 G2 G3 G4	25 to 125cm	15 to 85cm	ZFL20 ZFL10	15 to 35cm	3L: 3.5m 5L: 5m 10L: 10m	RCX340-3							

Specify various controller setting items. RCX340 ▶ P678

Specification

	X-axis	Y-axis	Z-axis: ZFL20	Z-axis: ZFL10
Axis construction Note 1	F17	F14H-BK	F10H-BK	
AC servo motor output (W)	400	200	200	
Repeatability Note 2 (mm)	+/-0.01	+/-0.01	+/-0.01	
Drive system	Ball screw ϕ20	Ball screw ϕ15	Ball screw ϕ15	
Ball screw lead Note 3 (Deceleration ratio) (mm)	20	20	20	10
Maximum speed Note 4 (mm/sec)	1200	1200	1200	600
Moving range (mm)	250 to 1250	150 to 850	150 to 350	
Robot cable length (m)	Standard: 3.5 Option: 5,10			

Note. The standard types are ZFL with higher rigidity as compared with ZF types which are conventional standard types. When you need the ZF type, please consult YAMAHA.
Note 1. Use caution that the flame machining (installation holes, tap holes) differs from single-axis robots'.
Note 2. Positioning repeatability in one direction.
Note 3. Leads not listed in the catalog are also available. Contact us for details.
Note 4. When the X-axis stroke is longer than 850mm (750mm for Y-axis), resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.

Maximum payload (kg)

	Z stroke (mm)					
	ZFL20			ZFL10		
Y stroke (mm)	150	250	350	150	250	350
150	8	8	8	15	15	15
250	8	8	8	15	15	15
350	8	8	8	15	15	15
450	8	8	8	15	15	15
550	8	8	8	15	15	15
650	8	8	8	15	15	15
750	8	8	8	15	15	15
850	8	8	8	12	11	10

Controller

Controller	Operation method
RCX340	Programming / I/O point trace / Remote command / Operation using RS-232C communication

MXYx 3 axes / ZFL20/10 G1

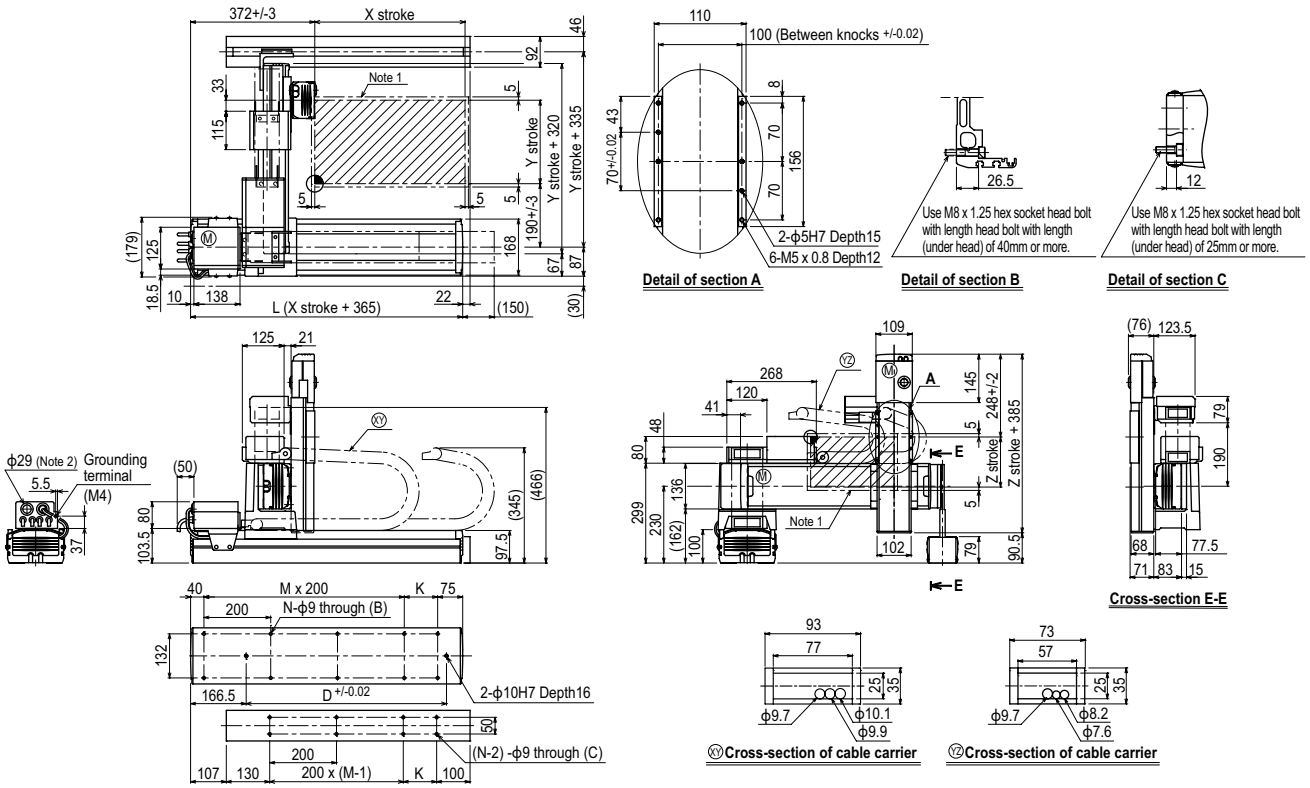

X stroke	250	350	450	550	650	750	850	950	1050	1150	1250
L	615	715	815	915	1015	1115	1215	1315	1415	1515	1615
K	100	200	100	200	100	200	100	200	100	200	100
D	240	420	600	600	780	780	960	960	1140	1140	1320
M	2	2	3	3	4	4	5	5	6	6	7
N	8	8	10	10	12	12	14	14	16	16	18

Y stroke	150	250	350	450	550	650	750	850
Z stroke	150	250	350					

Maximum speed for each stroke (mm/sec) Note 3								
X-axis	1200			960	840	720	600	480
Speed setting	–			80%	70%	60%	50%	40%
Y-axis	1200			960	780			
Speed setting	–			80%	65%			

Note 1. The moving range when returning to origin and the stop position when stopping by the mechanical stopper.
Note 2. User cable extraction port.
Note 3. When the X-axis stroke is longer than 850mm (750mm for Y-axis), resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.

Controller RCX340 ▶ 678